



T-LAMP

HIGH EFFICIENCY
LED STREET LUMINAIRES
MADE IN THE EU

 Address

Šuceva 27, 4000 Kranj,
Slovenia, EUROPE

 Contact info

E-mail: luxtella@luxtella.com
WWW.LUXTELLA.COM
Tel: + 386 4 20 20 246
Fax: + 386 4 204 21 22

 luxtella

TECHNICAL DATA

Luxtella street T-lamp luminaries are technical luminaries that are designed to fulfil the most demanding light calculation scenes like S, ME, CE classes with different adaptation to local lighting standards.

Electrical characteristics
<ul style="list-style-type: none"> • 220 - 240 V (50 - 60 Hz) input • 110 - 277 V input voltage range upon request • Power factor at full load more than 0,95 • Total harmonic distortion (THD) 8 % • Up to 94 % driver efficiency at full load with Philips Xitanium LED driver • Dimming options: Lumistep, Line swich, DALI, 1 - 10 V and Dynadimmer (autonomous dimming) upon request • 6 kV differential mode and 8 kV common mode standard surge protection. 10 kV surge protection upon request • Protection class I or protection class II



Mechanical characteristics
<ul style="list-style-type: none"> • Housing made of aluminium • Lamp is equipped with 60 mm pole connector • Equipped with connecting electrical cable 0,5 m, longer cables upon request • Finish made of anodisation and dust painted with epoxy paint thermal treatment to ensure long-term environmental protection against all weather conditions. RAL 9006 or upon on request • All screws are made of stainless steel • All gaskets are made of ozone and UV resistant silicone for IP66 protection

LEDs



We use highly efficient & reliable Cree LEDs which ensure long term operation for the lifetime of the luminaire and highest lm/w efficiency in the industry. In the spreadsheet below the total – system W is stated. Below power (W) of lamp is a result in the working mode of lamp (app. 1.5h after a lamp is turned on). Below lumen is LED lumen. System lumen is available for each optic in IES files and is lower than the LED lumen by app. 5 % (depending on the type of lens). Different colour temperatures are available upon request. The below results in the table are written for 4000 K and 3000 K (average results).

No. LED	Current [mA]	Sys power [W]	4000K [lm]	3000K [lm]
24	500	38	5700	5450
	600	45	6650	6300
	700	53	7500	7150
	800	60	8350	7900
	900	68	9100	8650
48	500	72	11150	10600
	600	87	12950	12300
	700	102	14650	13900
	800	117	16200	15400
	900	132	17700	16850
72	500	90	13700	13000
	600	108	15900	15100
	700	127	17950	17100
	800	146	19900	18900
	900	165	21700	20650




We can supply also Luxtella with a different driving current upon request.

OPTICAL DATA


Optical characteristics

- Standardly we are using PMMA that is 100 % UV resistant which prevents yellowing over the entire life time of the lenses.
- Polycarbonate lenses ensure high impact resistance.
- Photometric IES files are available upon request.

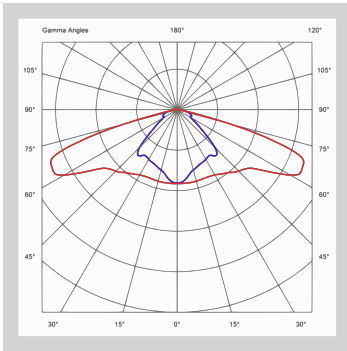


Optic B
(with XTE LEDs)

Optimised for ME and S road classes and narrow roads (IESNA TYPE II). Pole height 4 – 6 m, pole spacing from 20 – 30 m (S classes), and height from 7 – 12 m, spacing from 30 – 40 m (ME classes).

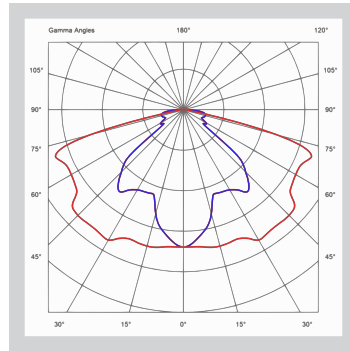

Optic H
(with XPL and XTE LEDs)


Optimised for ME road classes and wider roads (IESNA TYPE III). Pole height from 7 – 12 m, pole spacing from 25 – 45 m.

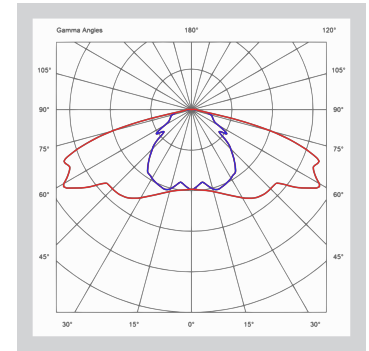

Optic D
(with XPL and XTE LEDs)


Optimised for S road lighting classes with narrow roads (IESNA TYPE II/III) Pole height from 4 – 8 m, pole spacing from 25 – 45 m.

*upon request we can also supply a modified optic D without back spill light.

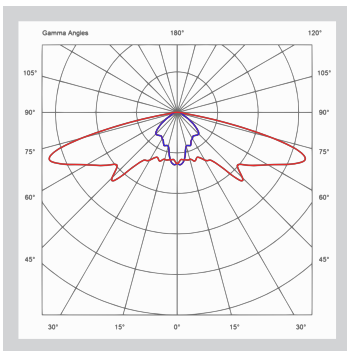

Optic O
(with XPL LEDs)

Wide beam optics (IESNA TYPE II) optimised for long pole distances, pedestrian & bike paths. Pole height from 4 – 9 m, pole spacing from 30 – 55 m.

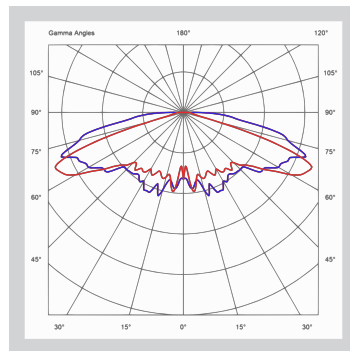

Optic M
(with XPL LEDs)

Forward-throw beam optics (IESNA TYPE IV) optimised for wide outdoor areas and parking lots. Pole height from 6 – 12 m, pole spacing from 15 – 25 m.





MECHANICAL DATA

24, 48, 72 LED lamp

- Gross weight: 8,8 kg
- Net weight: 8,2 kg
- Wind area: 0,035 m²
- Box dimension: 60 x 30 x 20 cm
- Full euro pallet dimension: 24 units: 80 x 120 x 150 cm

- Operating temperature from -40°C up to 55°C.
- Our standard warranty(acc. warranty conditions) is 5 years but the warranty may be extended for up to 10 years



The manufacturer reserves all rights to make changes in the materials and components used in its products. All data is subject to change without prior notice.

In addition, other features are available upon request (for example NEMA socket), consult your sales manager for the correct code!



Company certified with



Luxtella is the brand name of luminaires produced by

📍 Address

Le-tehnika d.o.o.
Šuceva 27, 4000
Kranj, Slovenia,
EUROPE

☎ Contact info

Tel: + 386 4 20 20 246
Fax: + 386 4 204 21 22

🌐 web Info

WWW.LUXTELLA.COM