
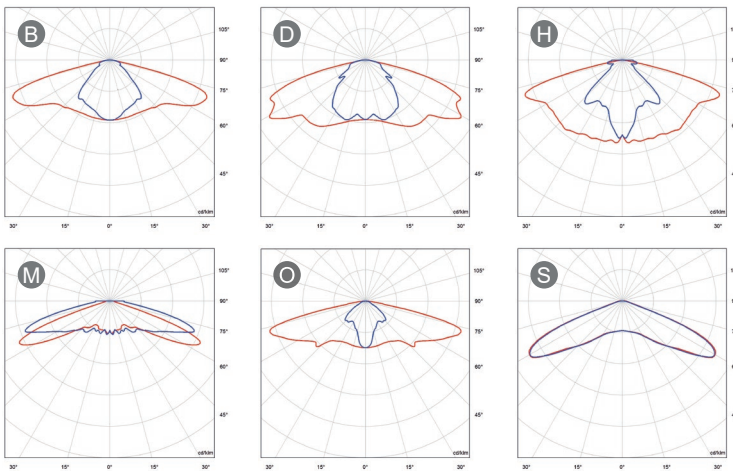


LUXTELLA T - LAMP

LZ series

	W	LED lm 4000K*	Sys lm/W up to 4000K*	D (mm)
STANDARD				
24 LED	24 - 81	3.894 - 11.566	155	526
48 LED	44 - 156	7.777 - 22.734	166	526
SUPREME				
112 LED	27 - 53	4.870 - 9.314	167	406
224 LED	51 - 102	9.323 - 17.990	170	616

*for 3000K - STANDARD values of LED lm and sys lm/W are 5% lower than 4000K
SUPREME values of LED lm and sys lm/W are equivalent to 4000K

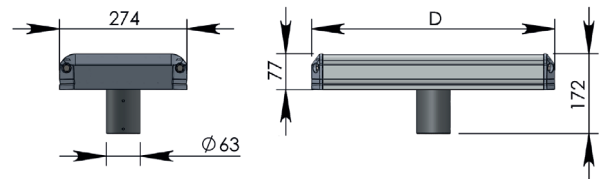

ITALY



This luminaire belongs to the family of Luxtella street LB series. It is especially suitable for locations where symmetrical illumination is needed, like parks, parking lots, or roads with lights on median strip (central reservation). Silicone gaskets ensure IP66 protection, whole fixture is up to IK10 resistant. Standard wide range of optics applied to Luxtella Street LB line are used also for this luminaire with additional function to illuminate symmetrically to both sides. For easier installation, luminaires are equipped with 0,5 m cable as a standard.



Svetilka spada v družino svetilk serije LB. Posebej je primerna za lokacije, kjer je potrebna simetrična osvetlitev, kot so parki, parkirišča ali zeleni pas na sredini ceste. Silikonska tesnila zagotavljajo zaščito IP66, celotna svetilka je odporna na do IK10. S to svetilko običajno uporabljamo standardno optiko, primerno za serijo LB, kjer se polovica optike zavrti za 180 stopinj. Za lažjo namestitvev so svetilke standardno opremljene z 0,5 m kablom.



Diese Leuchte gehört zur Familie der Luxtella Street LB-Serie. Besonders geeignet für Orte, an denen eine symmetrische Beleuchtung erforderlich ist, z. B. in Parks und Parkplätzen. Silikonabdichtungen gewährleisten die Schutzart IP66, die gesamte Leuchte ist bis zum IK10-beständig. Bei dieser Lampe verwenden wir normalerweise Standardoptiken, die für die Luxtella LB-Reihe geeignet sind, bei der die Hälfte der Optiken um 180 Grad gedreht ist. Zur einfacheren Installation sind die Lampen standardmäßig mit einem 0,5 m langen Kabel ausgestattet.